

## SUPERIOR QUALITY & HIGH BRIGHTNESS

### Features & Benefits

- Die-casting technology by ADC12, excellent thermal management, reduce the temperature difference and ensure the lumen depreciation
- 4mm tempered glass, Integrated Breather Valve: Balances The Internal & External Temperature and Humidity
- Offset bracket design, Racked Angle  $\pm 120^\circ$  adjustable, Allows For Precise Installation
- Top brand LED chip and driver, ensure the product quality and lifetime
- Ingress Protection Rating: IP66
- Operation Temperature:  $-25^\circ\text{C} \sim +50^\circ\text{C}$
- 3000K, 4000K, 5000K, 5700K, 6500K available
- CRI > 70, 80
- 5 years Warranty



[www.arraystarled.com](http://www.arraystarled.com)



[info@arraystarled.com](mailto:info@arraystarled.com)



Tel: 86-755-28894606  
Fax: 86-755-28713279



Block F, TaoJinDi Industrial Park, TengLong Road, Dalang Street, LongHua District, ShenZhen, GuangDong, China

Die-casting technology by ADC12

ACD12 Frame, Concise appearance, No Screws design.

Racked Angle, 10° steps, allows for 270° installation adjustment.

4mm Tempered Glass

Hem corner, strengthen stability

Breather Valve, balance the internal and external pressure and humidity

Offset bracket and Galvanized treatment, corrosion resistant



30W

50W

100W

150W

200W

250W/300W

400W/500W

IP66

KG  
IK08

120°

50,000HS

CRI  
80



[www.arraystarled.com](http://www.arraystarled.com)



[info@arraystarled.com](mailto:info@arraystarled.com)




Tel: 86-755-28894606  
Fax: 86-755-28713279



Block F, TaoJinDi Industrial Park, TengLong Road, Dalang Street, LongHua District, ShenZhen, GuangDong, China

### Dimension

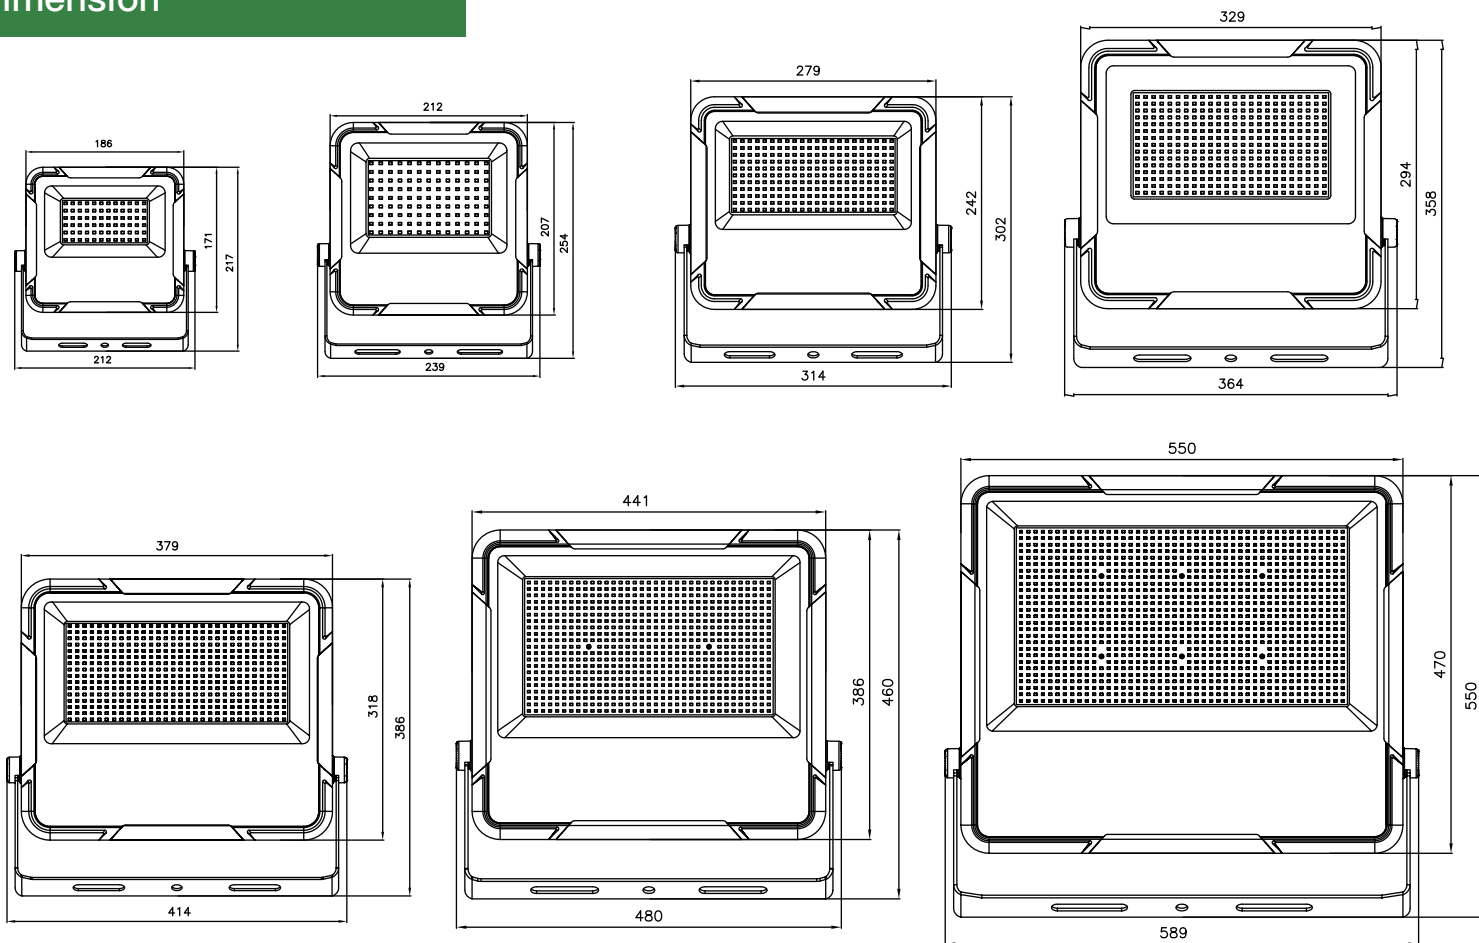

### Specification

Model No.	ART-FL-08-H30W	ART-FL-08-H50W	ART-FL-08-H100W	ART-FL-08-H150W	ART-FL-08-H200W	ART-FL-08-H250W	ART-FL-08-H300W	ART-FL-08-H400W	ART-FL-08-H500W
Input Voltage	AC100-277V, 50-60Hz								
Output Voltage	DC45V								
Rated Power	30W	50W	100W	150W	200W	250W	300W	400W	500W
Qty of LED	75PCS*2835	120PCS*2835	240PCS*2835	360PCS*283	480PCS*2835	600PCS*2835	720PCS*2835	960PCS*2835	1200PCS*2835
PF	>0.95								
LED Brand	Lumileds								
Luminous Flux	4500lm±5%	7500lm±5%	15000lm±5%	22500lm±5%	30000lm±5%	37500lm±5%	45000lm±5%	60000lm±5%	75000lm±5%
CRI	Ra>70,80								
CCT	3000-6500K								
Beam Angle	120°								
Driver Brand	ZH	MW/SOSEN/ZH	MW/SOSEN/ZH	MW/SOSEN/ZH	MW/SOSEN/ZH	MW/SOSEN/ZH	MW/SOSEN/ZH	MW/SOSEN/ZH	MW/SOSEN/ZH
IK Rating	IK08								
IP Rating	IP66								
Life Span	50000Hrs								
Size	217*212*38mm	254*239*38mm	302*314*49mm	358*364*49mm	386*414*51mm	460*480*54mm	460*480*54mm	550*589*56mm	550*589*56mm
Certification	CB/ENEC/CE/SAA/FCC/RoHS/CQC								

