BESEN EV WALLBOX

APP version

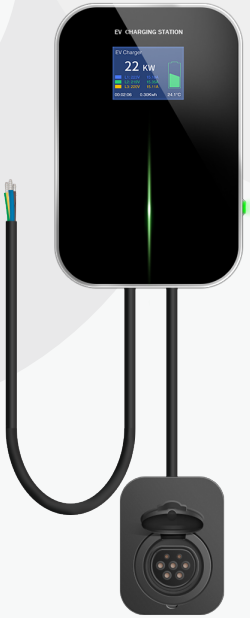

Charging Time Setting
Freely set the charging time and duration

Charging History Record
Query charging history anytime, anywhere

Remote Control by APP
start or stop charging via Bluetooth

Firmware Update
Make app version upgrades

HISTORY RECORD

Check your charging history documents anytime

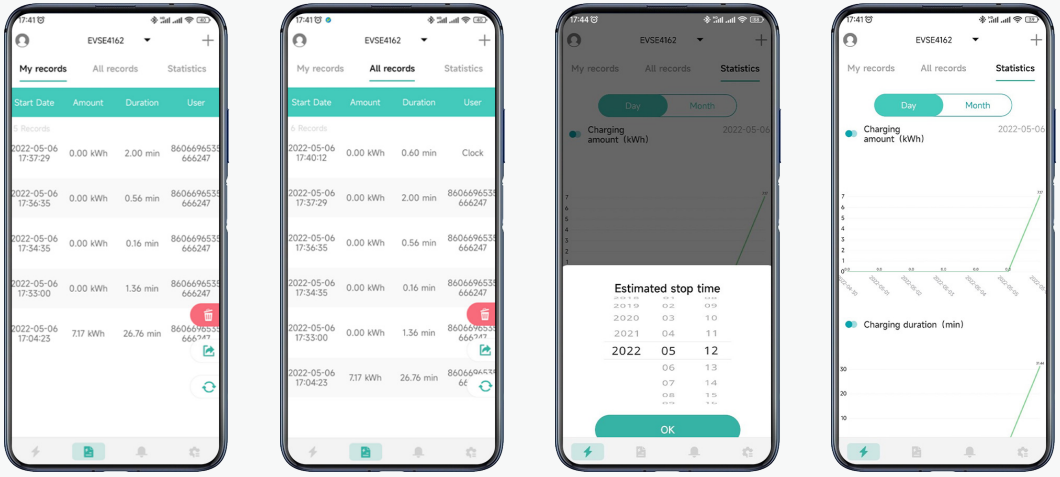

Model BS20-APP	
Input & Output	
Input voltage/Output voltage	AC 230V/400V
Input frequency	47~63Hz
Max. output power	7.6kW(1 Phase)/22kW(3 Phase)
Max. output current	32A
Charging interface type	IEC 62196-2, SAE J1772
Protection	
Over voltage protection	✓
Under voltage protection	✓
Overload protection	✓
Short circuit protection	✓
Earth leakage protection	✓
Over-temp protection	✓
Lightning protection	✓
Function	
Bluetooth	✓
LCD	3.5-inch color display
RCD	Type A / Type A+6mA DC
LED Indicator light	✓
Intelligent power adjustment	✓
RFID	Optional
Working environment	
Protection degree	IP66
Environment temperature	-40℃ ~ +75℃
Relative humidity	0-95% non-condensing
Maximum altitude	<2000m
Cooling	Natural air cooling
Standby power consumpiton	<8W
Mechnical	
Dimension (W/H/D)	295/195/65mm
Weight	6KG~8KG
Mounting Accessories	
Wall-mounting bracket	✓
Ground-mounting pole	Optional
Certificate	
Certificate	CE, FCC, CSA, RoHS