

## Start Flood Flat PIR

Start Flood Flat IP54 PIR 2000LM 840 Black  
0050134



### Product features

- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood Flat a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 2000 lm, 19 W, 105 lm/W, 4000K, non dimmable, CRI>80, IP54, IK06 - fixture, IK05 - sensor, Class I, lifespan L70:B50: 90000 hrs, 190 x 123 x 52 mm (L x W x H). Weight: 0.475kg. PIR sensor included.



## PRODUCT OVERVIEW

Product name	Start Flood Flat IP54 PIR 2000LM 840 Black
Technology	LED
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4579540
Warranty	3 years
Fixture luminous flux (lm)	2000
Luminaire efficacy (lm/W)	105
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	110
Photobiological Risk Group	RG1
Total power consumption (W)	19.0
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	Low (6% - 20%)
Housing colour	Black
IP rating	IP54
IK rating	IK06
Product EAN number	5410288501345

## DATA TABLE

### General data

Product name	Start Flood Flat IP54 PIR 2000LM 840 Black
Technology	LED
General application	Residential & Consumer
Operating temperature range (°C)	-20°C - 40°C
ETIM Class	EC001744
E-number FI	4579540

## Start Flood Flat PIR

*Start Flood Flat IP54 PIR 2000LM 840 Black*  
0050134

Warranty	3 years
----------	---------

### Optical data

Fixture luminous flux (lm)	2000
Luminaire efficacy (lm/W)	105
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	110
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	19.0
Mains voltage (V)	220-240V
Lamp power factor	0.9
Electrical protection	Class I
Dimmable	No
Drive current (mA)	38
Inrush Current (A)	19.8
Inrush Duration (µs)	200
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. Luminaires per 10A C Breaker	15
Max. Luminaires per 13A C Breaker	21
Max. Luminaires per 16A C Breaker	25
Max. Luminaires per 20A C Breaker	32
Max. Luminaires per 10A B Breaker	10
Max. Luminaires per 13A B Breaker	12
Max. Luminaires per 16A B Breaker	15
Max. Luminaires per 20A B Breaker	19

### Lifetime data

Lifespan L70 B50	90000
Lifespan L80 B50	85000
Lifespan L80 B20	54000

### Physical data

Housing colour	Black
IP rating	IP54
IK rating	IK06
IK rating of sensor	IK05
Nominal Product Length (mm)	190
Nominal Product Width (mm)	123
Nominal Product Height (mm)	52
Weight (kg)	0.475

## Start Flood Flat PIR

Start Flood Flat IP54 PIR 2000LM 840 Black  
0050134


### Packaging

Single packaging type	Carton
Product EAN number	5410288501345
Packaging single length / height (cm)	13.0
Packaging single width (cm)	6.0
Packaging single depth (cm)	20.0
DUN14 (outer)	15410288501342
Units per outer package	6
Packaging outer length / height (cm)	39.0
Packaging outer width (cm)	14.5
Packaging outer depth (cm)	22.0

### Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

## PHOTOMETRY

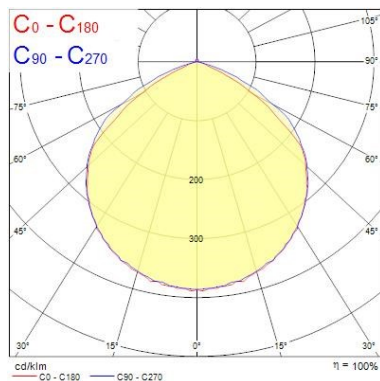

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam angle [°]	Illuminance [lx]
0.5	1.51 1.34	105° 90°	105° 90°	3088 262
1.0	3.01 2.67	105° 90°	105° 90°	772 66
1.5	4.52 4.01	105° 90°	105° 90°	343 29
2.0	6.02 5.35	105° 90°	105° 90°	193 16
2.5	7.53 6.68	105° 90°	105° 90°	124 10
3.0	9.03 8.02	105° 90°	105° 90°	88 7

Distance [m]  
Cone diameter [m]  
C0 - C180 (Half beam angle: 105.4°)  
C90 - C270 (Half beam angle: 112.8°)  
Illuminance [lx]

## TECHNICAL DRAWINGS

